




MULTILIFT

MULTILIFT ULTIMA 26S


POWER RANGE HOOKLIFTS

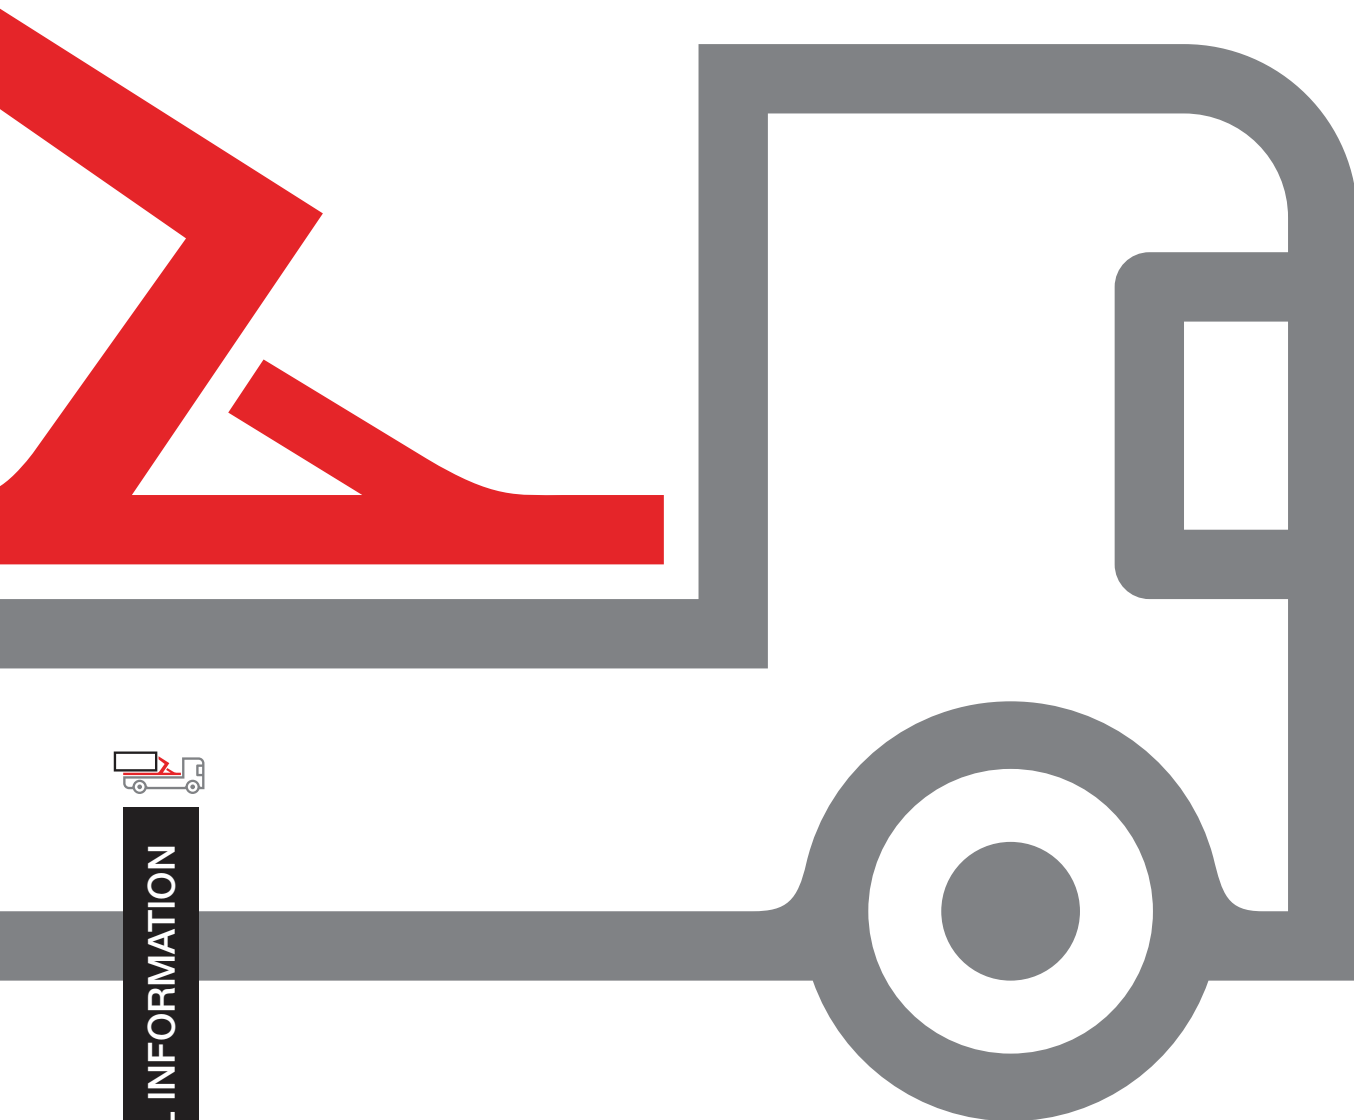

TECHNICAL INFORMATION

MULTILIFT ULTIMA 26S BASIC DATA

Type	ULTIMA 26S									
Vehicle type	4 axle									
GVW of the vehicle (ibs)	60,000+									
Capacity (ibs)	57,200									
G-length	51	53	56	56S	59	61	63	70	78	
System weight (ibs) *	5610	5830	5896	5896	6006	6050	6138	6790	7120	
Tipping angle (°)	49	52	52	49	52	49	46	50	46	
Max. operating pressure (MPa)	30									
Recommended oil flow (l/min)	120									

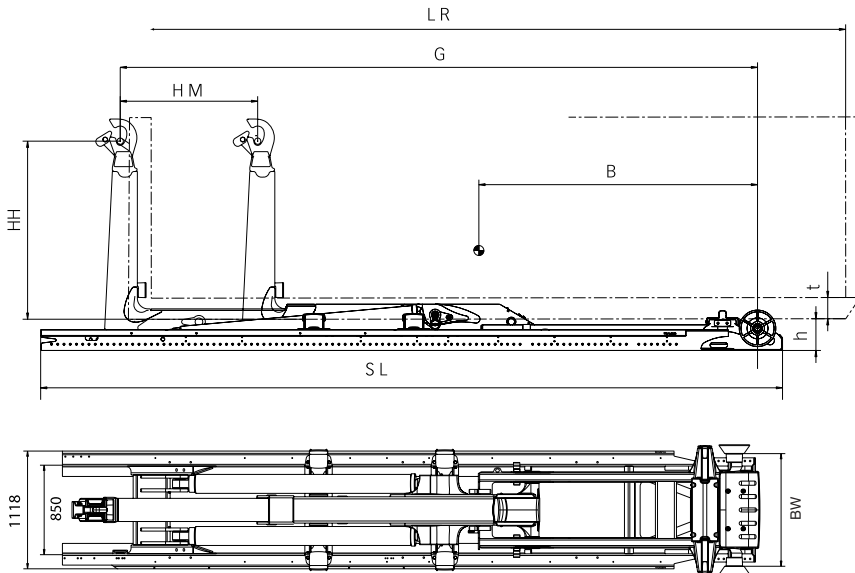

Primary dimensions

Model	ULTIMA 26S.51	ULTIMA 26S.53	ULTIMA 26S.56	ULTIMA 26S.56S	ULTIMA 26S.59	ULTIMA 26S.61	ULTIMA 26S.63	ULTIMA 26S.70	ULTIMA 26S.78
LR = Body length (min - max) (ft) internal	16 – 20	17 – 21	18 – 22	18 – 22	19 – 23	20 – 24	21 – 25	23 – 26	25 – 29
SL = Subframe length (ft)**	19.5	21.5	21.5	21.6	21.5	22.1	22.6	25.5	28.4
B = Centre of gravity (ft)	106	112	116	116	118	124	130	154	171
G = Exact G-length (ft)	16.7	17.6	18.2	18.3	19.2	19.9	20.7	22.9	25.5
HM = Horizontal movement (in)	43	43	51	43	57				
h = Installation height (in)***	10.63								
t = Min free tunnel height (body) (in)***	5								
HH = Hook height (in)***	54 / 62								
BW = Body width (in)***	42								

* Weight includes hydraulic body locking and excludes oil tank and oil.

** The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

*** Varies depending on country and body standard

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.